

This Page Is Inserted by IFW Operations  
and is not a part of the Official Record

## **BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images may include (but are not limited to):

- BLACK BORDERS
- TEXT CUT OFF AT TOP, BOTTOM OR SIDES
- FADED TEXT
- ILLEGIBLE TEXT
- SKEWED/SLANTED IMAGES
- COLORED PHOTOS
- BLACK OR VERY BLACK AND WHITE DARK PHOTOS
- GRAY SCALE DOCUMENTS

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning documents *will not* correct images,  
please do not report the images to the  
Image Problem Mailbox.**



EU

The  
Patent  
Office

PCT/GB 99 / 0 2 7 1 0

16 AUGUST 1999

GB99/2710

**PRIORITY  
DOCUMENT**SUBMITTED OR TRANSMITTED IN  
COMPLIANCE WITH RULE 17.1(a) OR (b)The Patent Office  
Concept House  
Cardiff Road  
Newport  
South WalesNP10 8QQ  
REC'D 23 SEP 1999

WIPO PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

I also certify that the attached copy of the request for grant of a Patent (Form 1/77) bears an amendment, effected by this office, following a request by the applicant and agreed to by the Comptroller-General.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.

Signed

Dated

13 SEP 1999

Patents Act 1977  
(Rule 13)

**Patent  
Office**

THE PATENT OFFICE  
A  
24 AUG 1998

24AUG98 E385298-7 D02821

P01/7700 25.00 - 9818363.5 The Patent Office

**Request for grant of a patent**  
(See the notes on the back of this form. You must also get an explanatory leaflet from the Patent Office to help you fill in this form)

Cardiff Road  
Newport  
Gwent NP9 1RH

1. Your reference

WEAA, 417C-UK

2. Patent  
(The Pat)

9818363.5

24 AUG 1998

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Weatherford/Lamb, Inc.  
c/o CSC - The United States Corporation  
Company  
1013 Centre Road  
Wilmington  
Delaware 19805  
USA 819581005  
USA, Delaware

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

4. Title of the invention

METHODS AND APPARATUS FOR FACILITATING  
THE CONNECTION OF TUBULARS USING A TOP  
DRIVE

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom  
to which all correspondence should be sent  
(including the postcode)

Brian Lucas  
Lucas & Co  
135 Westhall Road  
Warlingham  
Surrey CR6 9HJ

MARKS + CLARK, - 8th 15/17  
4220 NASH COURT, 14/16  
OXFORD BUSINESS PARK SOUTH  
OXFORD  
OX4 2RU

Patents ADP number (if you know it)

05815709001 ✓

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number  
(if you know it)

Date of filing  
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing  
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

- a) any applicant named in part 3 is not an inventor, or
  - b) there is an inventor who is not named as an applicant, or
  - c) any named applicant is a corporate body.
- See note (d))

# Patents Form 1/77

9. Enter the number of sheets for each of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form

Description	7
Claim(s)	2
Abstract	1
Drawing(s)	7 + 7

10. If you are also filing any of the following, state how many against each item.

Priority documents

Translations of priority documents

Statement of inventorship and right to grant of a patent (Patents Form 7/77) TWO

Request for preliminary examination and search (Patents Form 9/77) ONE

Request for substantive examination (Patents Form 10/77)

Any other documents (please specify)

11. I/We request the grant of a patent on the basis of this application.

Signature

Date

*Rian Lucas*

12. Name and daytime telephone number of person to contact in the United Kingdom

## Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

## Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

DUPLICATE

Methods and Apparatus for Facilitating  
the Connection of Tubulars Using a Top Drive

This invention relates to methods and apparatus for facilitating the connection of tubulars using a top drive and is more particularly, but not exclusively for facilitating the connection of a section or stand of casing to a string of casing.

In the construction of wells such as oil or gas wells, it is usually necessary to line predrilled holes with a string of tubulars known as casing. Because of the size of the casing required, sections or stands of say two sections of casing are connected to each other as they are lowered into the well from a platform. The first section or stand of casing is lowered into the well and is usually restrained from falling into the well by a spider located in the platform's floor. Subsequent sections or stands of casing are moved from a rack to the well centre above the spider. The threaded pin of the section or stand of casing to be connected is located over the threaded box of the casing in the well to form a string of casing. The connection is made-up by rotation therebetween.

It is common practice to use a power tong to torque the connection up to a predetermined torque in order to perfect the connection. The power tong is located on the platform, either on rails, or hung from a derrick on a chain. However, it has recently been proposed to use a top drive for making such connection.

It has been observed that sections or stands of tubulars are often not as uniform as desired. In particular, the sections or stands of tubulars are often not straight. The top drive is in perfect alignment with the centre of the spider in the platform of an oil or gas rig. However, a section or stand of tubulars located in the spider would not always be in alignment

with the top drive.

Accordingly, there is provided an apparatus for facilitating the connection of tubulars using a top drive, the apparatus comprising a stator attachable to said top drive, and a supporting member for supporting a tool wherein means are provided to allow substantially horizontal movement of said supporting member.

There is also provided a method for facilitating the connection of tubulars using a top drive, the method comprising the steps of moving a tool connected to said top drive horizontally whilst remaining connected thereto.

15

20

25

30

35

For a better understanding of the present invention, reference will now be made, by way of example, to the accompanying drawings, in which:-

Figure 1 is a side view in perspective of an apparatus in accordance with the invention in use;

Figure 2 is an enlarged view of parts of Figure 1, with parts inserted in a tubular and with parts cut away;

Figure 3 is an enlarged cross-sectional view in perspective of part of the apparatus of Figure 1;

Figure 4 is an enlarged view of parts of the supports of Figure 1 in a displaced position;

Figure 5 is an enlarged view of parts of the apparatus of Figure 1 in a second displaced position;

Figure 6 shows the apparatus of Figure 1 in a further stage of operation;

Figure 7 is a second embodiment of the present invention.

Referring to Figure 1 there is shown an apparatus which is generally identified by reference numeral 1.

The apparatus 1 depends from a rotor 2' of a top drive 3. A tool 4 for gripping a tubular depends from the lower end of the apparatus 1. A rigid guide member 5 is provided to guide the rotor 2 of the apparatus 1. The rigid guide member 5 is fast with a stator 5' of the top drive 3. The rotor 2' of the top drive 3 is coupled by a threaded connection to the rotor 2 of the apparatus 1. The rigid guide member 5 may be provided with a clamp for clamping the rotor 2 of the apparatus 1 so that the threaded connection to the rotor 2' of the top drive 3 can be made, after which the clamp would be released.

An elevator 6 is provided on the end of bails 7, 8 which are hung from the top drive 3. Piston and cylinders 9, 10 are arranged between the bails 7, 8 and the

top drive 3 for moving the elevator 6 from below the top drive 3 to an out of the way position.

Referring now to Figure 2, there is shown the apparatus 1 which comprises a plate 11 which is fixed to a connecting tubular 12 by a collar 13. The connecting tubular 12 passes through a hole 14 in rigid body 5 and connects with the rotor 2 (Figure 1). The plate 11 has two projections 15 and 16 which have holes 17 and (not shown) for accommodating axles 18 and (not shown), which are rotationally disposed therein. The axles 18 and (not shown) are integral with a rigid body 19. A slider 20 is arranged on runners 21 and (not shown) on either side of the rigid body 19. Arms 22 and (not shown) are connected at one end to the slider 20 via spherical bearings 23 and (not shown).

The other end of arms 22 and (not shown) are connected to a supporting member 24 via spherical bearings 25 and (not shown).

The arms 22 and (not shown) are provided with lugs 26 and (not shown) to which one end of a piston and cylinder 28 and 29 is attached and are movable thereabout. The other end of each piston and cylinder 28 and 29 is attached to lugs 30 and 31 and is movable thereabout. The lugs 30 and 31 are fixed to plate 11.

A mud pipe 32 is provided between the plate 11 and the supporting member 24 for carrying mud to the inside of a tubular therebelow. The mud pipe 32 is located in cylindrical sections 33 and 34 which are attached to the plate 11 and the supporting member 24. The mud pipe 32 is provided with a lobe 35 formed on the outer surface thereof and is located in a corresponding recess 36 in a cylindrical section 33 (Figure 3). A lobe 37 is slidably arranged on the lower end of the mud pipe 32 with an o-ring seal 38 arranged therebetween to inhibit fluid from leaking therebetween. The lobe 37 is located



in a corresponding recess 39 in cylindrical section 34. This arrangement allows a ball and socket type movement between the plate 11 and the supporting member 24 and relative longitudinal movement therebetween.

5 Referring back to Figure 2, a tool 4 for gripping a tubular is fixed and depends from the supporting member 24 of the apparatus 1. Such a tool is disclosed in UK Application No. .... entitled "An Apparatus for Facilitating the Connection of Tubulars Using a Top Drive"  
10 filed by the present applicants on even date herewith.

In use, a tubular 40 to be connected to a tubular string held in a spider (not shown), is located over the tool 4. The tool 4 grips the tubular 40. The apparatus 1 and the tubular 40 are lowered by moving the top drive  
15 so that the tubular 40 is in close proximity with the tubular string held in the spider. However, due to, amongst other things, manufacturing tolerances in the tubular 40, the tubular often does not align perfectly with the tubular held in the spider. The apparatus 1  
20 allows minor vertical and horizontal movements to be made. The piston and cylinders 28 and 29 allow vertical movement, and may be controlled remotely. The piston and cylinders 28 and 29 may be of the pneumatic compensating type, i.e. their internal pressure may be adjusted to compensate for the weight of the tubular 40 so  
25 that movement of the tubular may be conducted with minimal force. Pneumatic compensating piston and cylinders also reduce the risk of damage to the threads of the tubulars. This can conveniently be achieved by  
30 introducing pneumatic fluid into the piston and cylinders 28 and 29 and adjusting the pressure therein. The piston and cylinders 28 and 29 may be hydraulic or may be hydraulic and provided with pneumatic bellows.

Tubular manipulating equipment such as stabbing  
35 guides may be used to direct the pin (not shown) of the

tubular 40 into the box of the tubular string held in the spider. The apparatus 1 allows horizontal movement of the tubular 40 relative to the top drive 3. Once the tubular 40 is in line with the tubular string, the top  
5 of the tubular 40 may be brought in line with the top drive which may be carried out with pipe handling equipment. The top drive 3 is now in direct alignment with the tubular string held in the spider, and can now rotate the apparatus 1 and hence the tool 4 and the  
10 tubular 40 to perfect a connection between the tubular 39 and the tubular string.

Figure 4 shows the supporting member 24, the tool 4 and the tubular 40 laterally in a 'y' direction out of alignment with the top drive 3. The mud pipe 32 has  
15 moved in recesses 36 and 39 and longitudinally in relation to o-ring seals 38. The piston and cylinders 28 and 29 have moved about lugs 26, 27, 30 and 31. Arms 22 and 22' have moved about spherical bearings 23, 23', 25 and 25'.

Figure 5 shows the supporting member 24, the tool 4 and the tubular member 40 laterally in an 'x' direction. The mud pipe 32 has moved in recesses 36 and 39 and longitudinally in relation to o-ring seals 38. The  
20 piston and cylinders 28 and 29 have moved about lugs 26, 27, 30 and 31. Rigid member 19 has moved about axles 18 and 18' and spherical bearings 23 and (not shown).

Figure 6 shows the elevator 6 swung in line with the top drive 3 by rotation of the piston and cylinders 9 and 10 acting on bails 7 and 8. The elevator 3 is  
30 located below a box 41 of tubular 40. The tubular 40 may be released from engagement with the tool 4. The elevator 6 may now be raised to take the weight of the tubular 40 and tubular string. The tubular string may now be lowered into the well.

35 Figure 7 is a second embodiment of the present

invention and is generally similar to that of Figures 1 to 6 further incorporating adjusting piston and cylinders 42 and 43 so that actuation of the piston and cylinders 42 and 43 can move the supporting member 24, the tool 4 and the tubular 40 depending therebelow in a horizontal plane in an x and y axis.

The piston and cylinder 42 is arranged between the plate 11 and the rigid member 19 on lugs 44 and 45. Actuation of the piston and cylinder 42 moves the supporting member 24, the tool 4 and the tubular 40 along a generally x-axis about axles 18 and 18'.

The piston and cylinder 43 is arranged between an extension of arm 22 and slider 20 on lugs 46 and 47. Actuation of the piston and cylinder 43 moves the supporting member 24, the tool 4 and the tubular 40 along a generally y-axis about spherical bearings 23, and 25 and the corresponding spherical bearings arranged in arm 22'.

The piston and cylinders 42 and 43 may be hydraulically or pneumatically operable and may be controlled via a remote control unit (not shown).

In use, a tubular 40 may be gripped by the tool 4 in the way described above and lowered into close proximity with the tubular string held in a spider. The adjusting piston and cylinders 42 and 43 may then be actuated to obtain alignment of the pin of the tubular 40 with the box of the tubular string held in the spider. The tubular 40 may then be rotated to obtain a partial connection or be held in alignment with an additional tool. The piston and cylinders 42 and 43 may then be returned to their original positions to obtain alignment with the top drive 3. The top drive 3 may then be used to torque the connection up to a predetermined torque to complete the connection.

It is envisaged that various modifications to the

above described embodiments, such as using a hydraulic motor in place of the supporting member 24.

5

10

15

20

25

30

35

40

CLAIMS

1. An apparatus for facilitating the connection of tubulars using a top drive, the apparatus comprising a stator (11) attachable to said top drive, and a supporting member (24) for supporting a tool (4) wherein means are provided to allow substantially horizontal movement of said supporting member (24).
2. An apparatus as claimed in Claim 1, 2 or 3, wherein said means also allows substantially vertical movement of said supporting member (24).
3. An apparatus as claimed in Claim 1 or 2, wherein said means comprises a rigid member (19) arranged between said stator (11) and said supporting member (24) and arranged on at least one axle (18, 18').
4. An apparatus as claimed in Claim 3, wherein said means further comprises at least one arm (22, 22') arranged between said rigid member (19) and said support member (24) and connected thereto by spherical bearings (25, 25').
5. An apparatus as claimed in any of Claims 2 to 4, wherein said means comprises piston and cylinders (28, 29) arranged between said stator (11) and said supporting member (24) to allow vertical movement of said supporting member (24).
6. An apparatus as claimed in any of Claims 2 to 5, further comprising a slider (20) to facilitate vertical movement of said supporting member (24).
7. An apparatus as claimed in any preceding claim, wherein a mud pipe (32) is arranged between said stator (11) and said supporting member (24).
8. An apparatus as claimed in Claim 7, wherein said mud pipe (32) is movable in relation to said stator (11) and said supporting member (24) about ball joints (35, 36, 37, 39).
9. An apparatus as claimed in any preceding claim,

wherein said supporting member (24) is a hydraulic motor.

10. An apparatus as claimed in any preceding claim including said tool (4).

5 11. An apparatus as claimed in Claim 10, wherein said supporting member (24) is integral with said tool (4).

12. An apparatus as claimed in Claim 10 or 11, wherein said tool (4) is for gripping a tubular (40).

10 13. An apparatus as claimed in any preceding claim including a top drive (3).

14. A method for facilitating the connection of tubulars using a top drive, the method comprising the steps of moving a tool connected to said top drive horizontally whilst remaining connected thereto.

15


20

25

30

35

FIG. 1

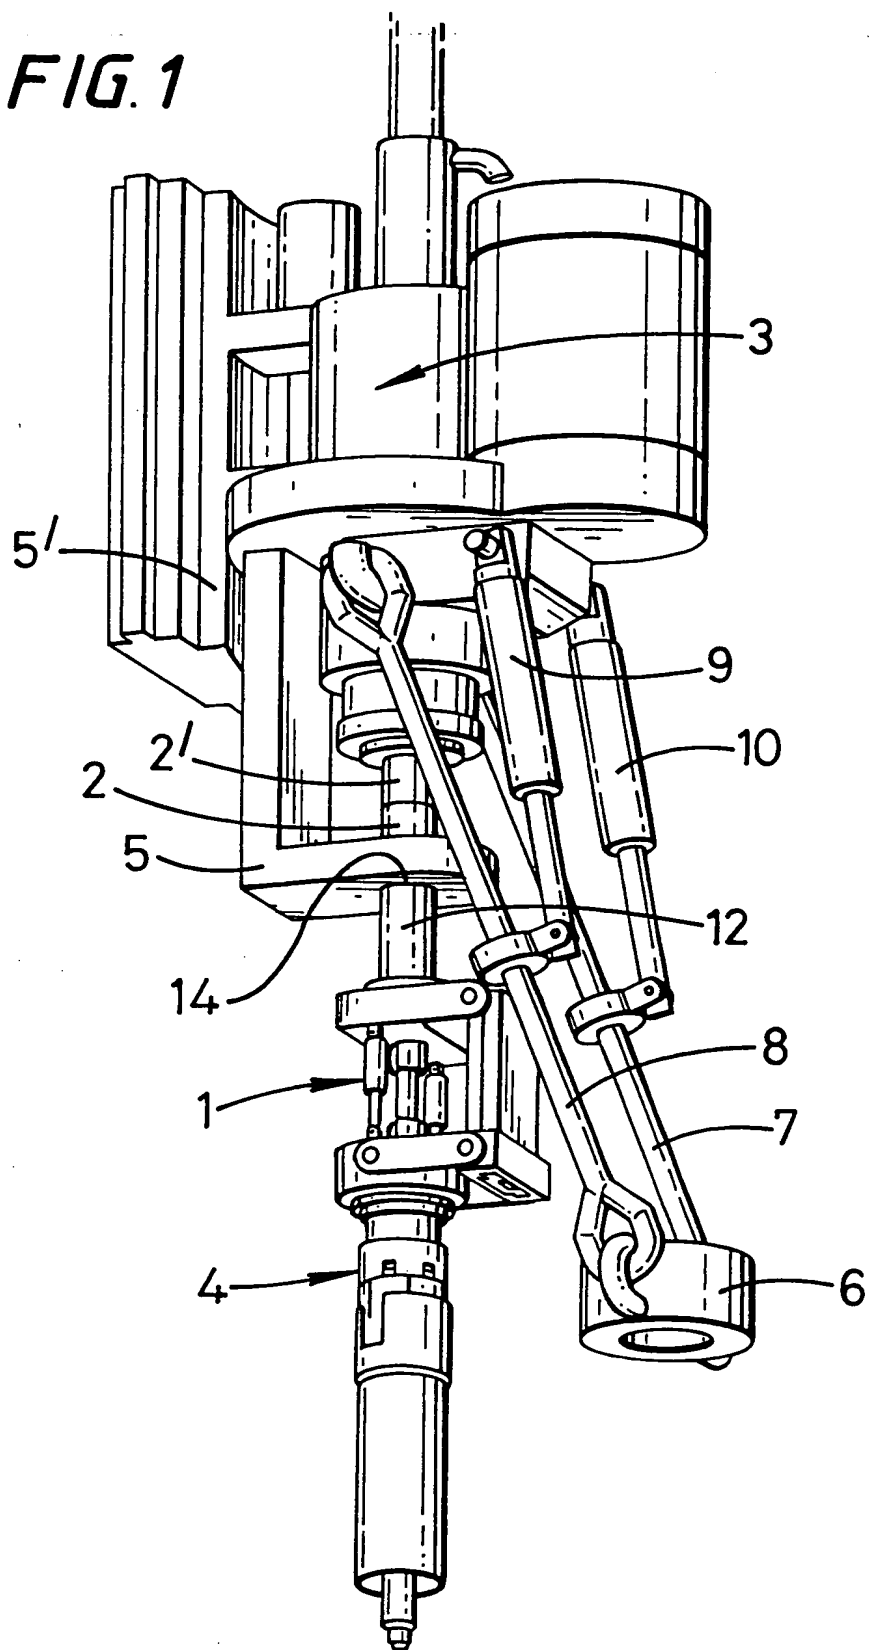

2/7

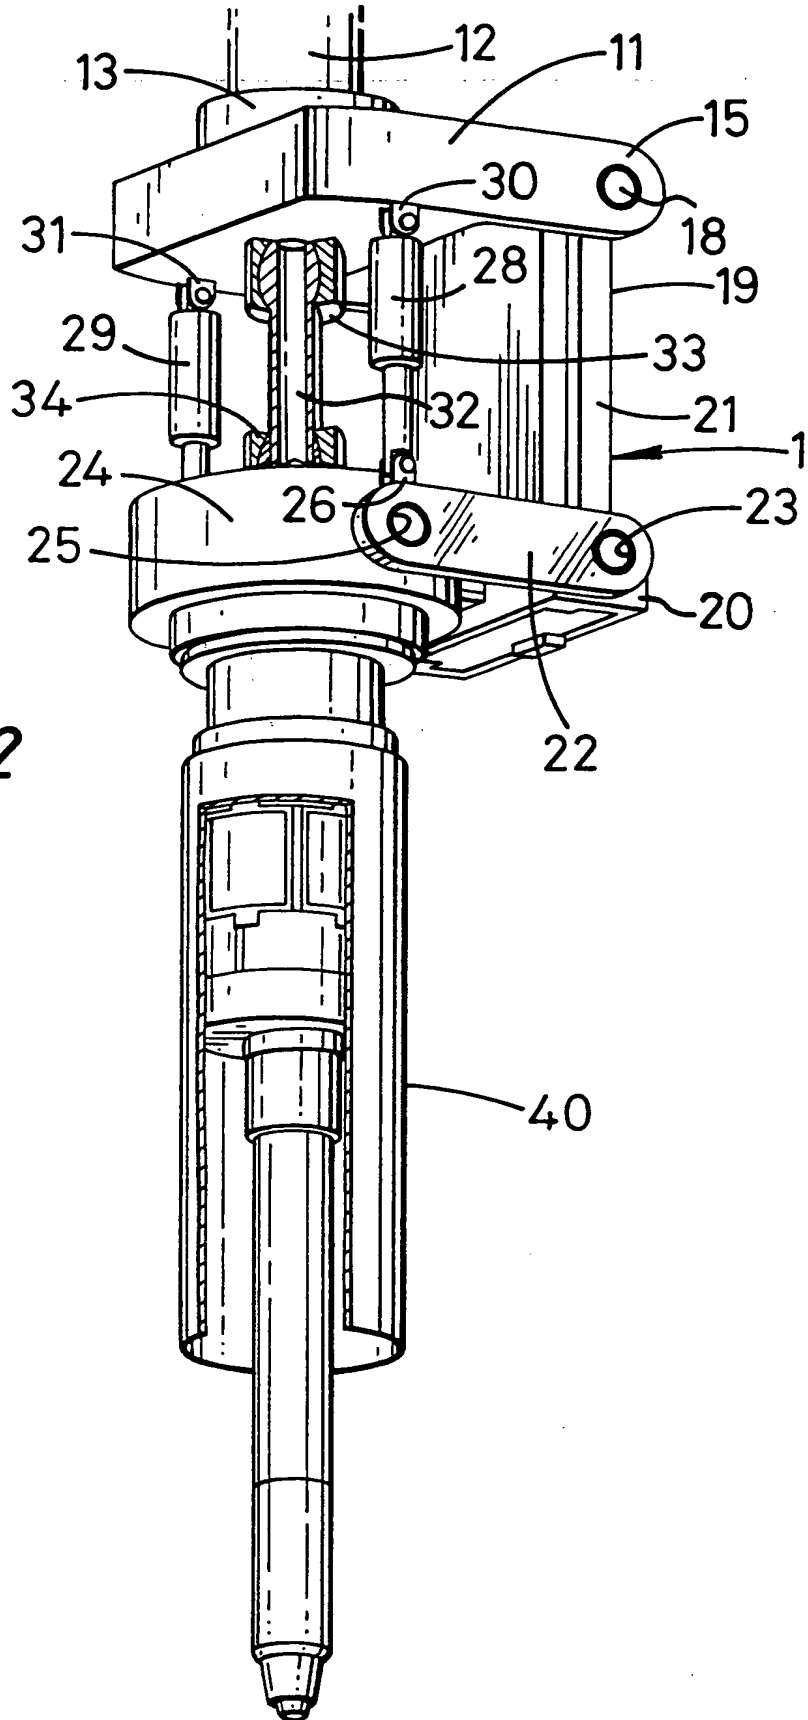


FIG. 2



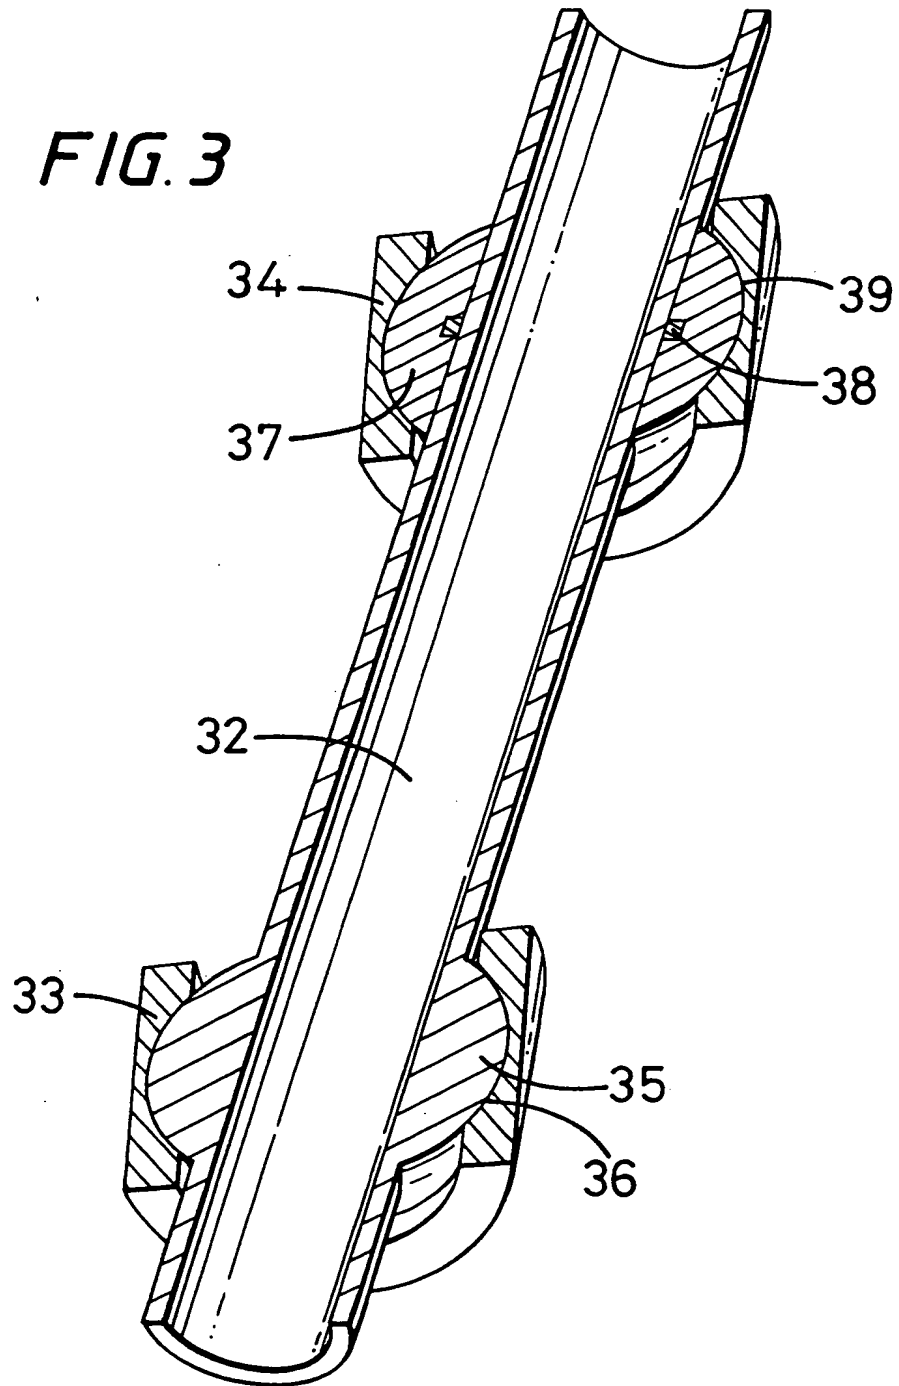
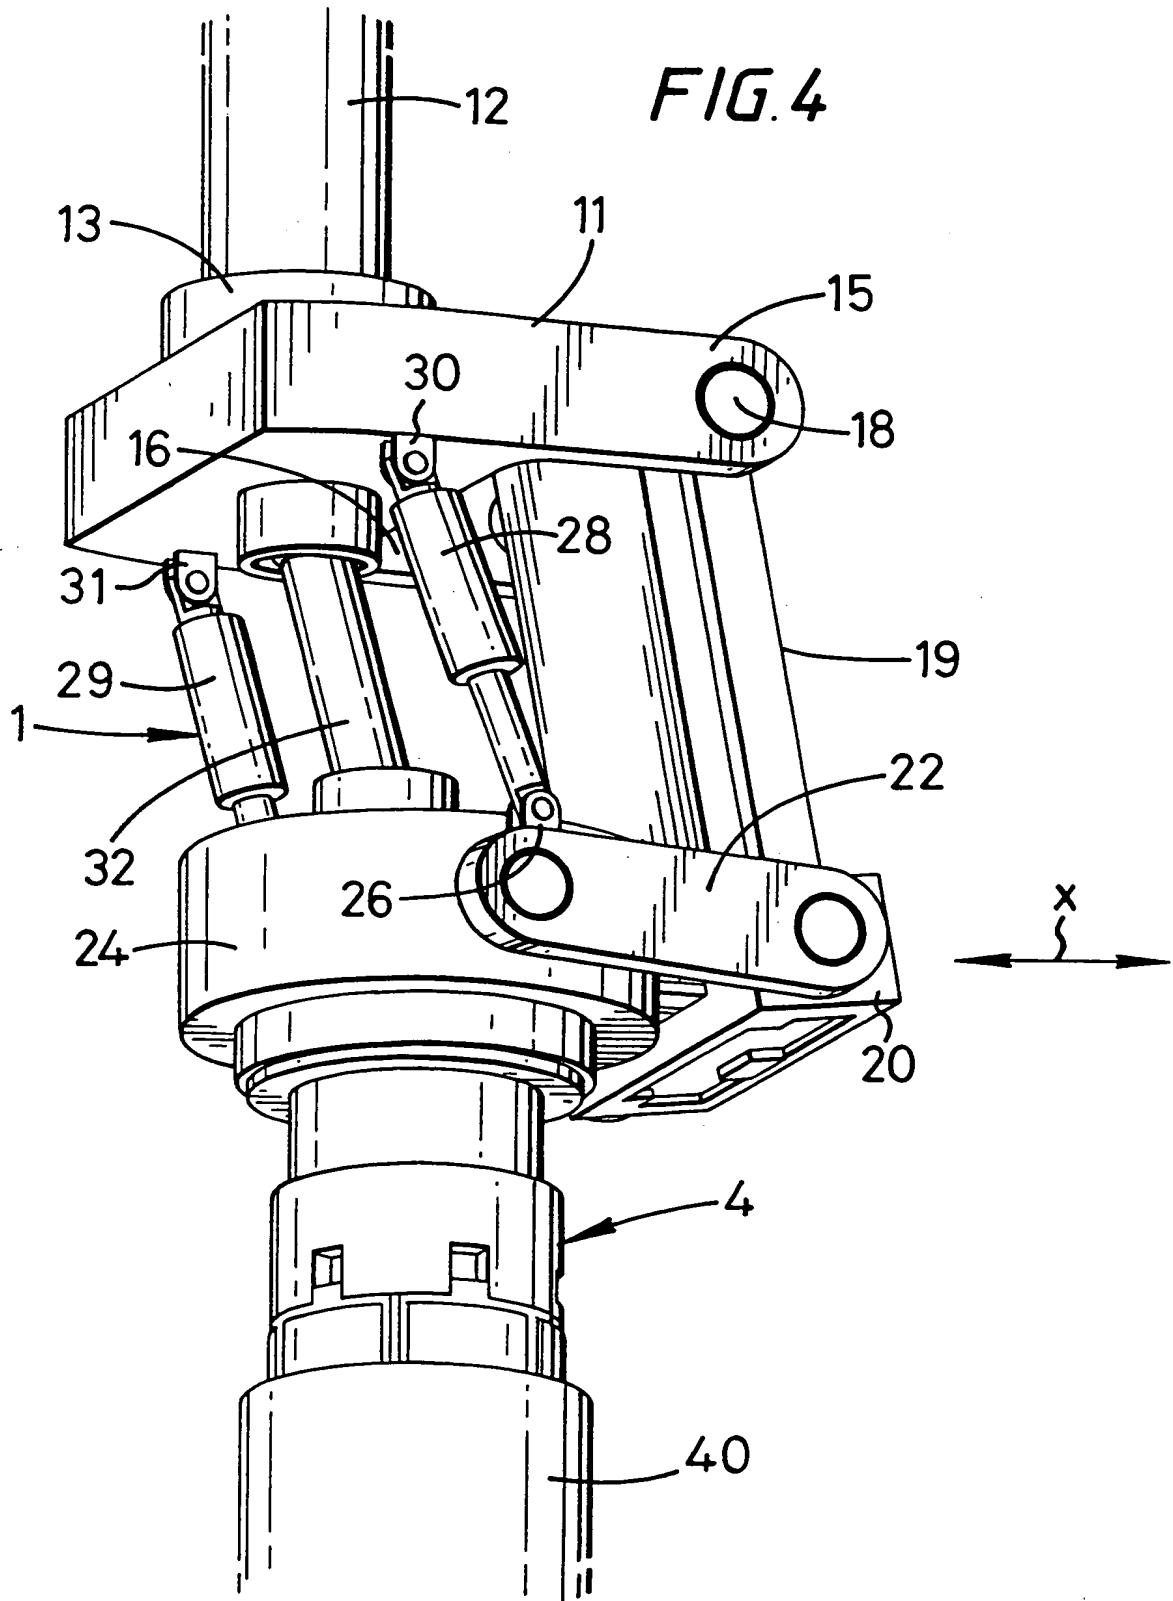
**FIG. 3**

FIG. 4



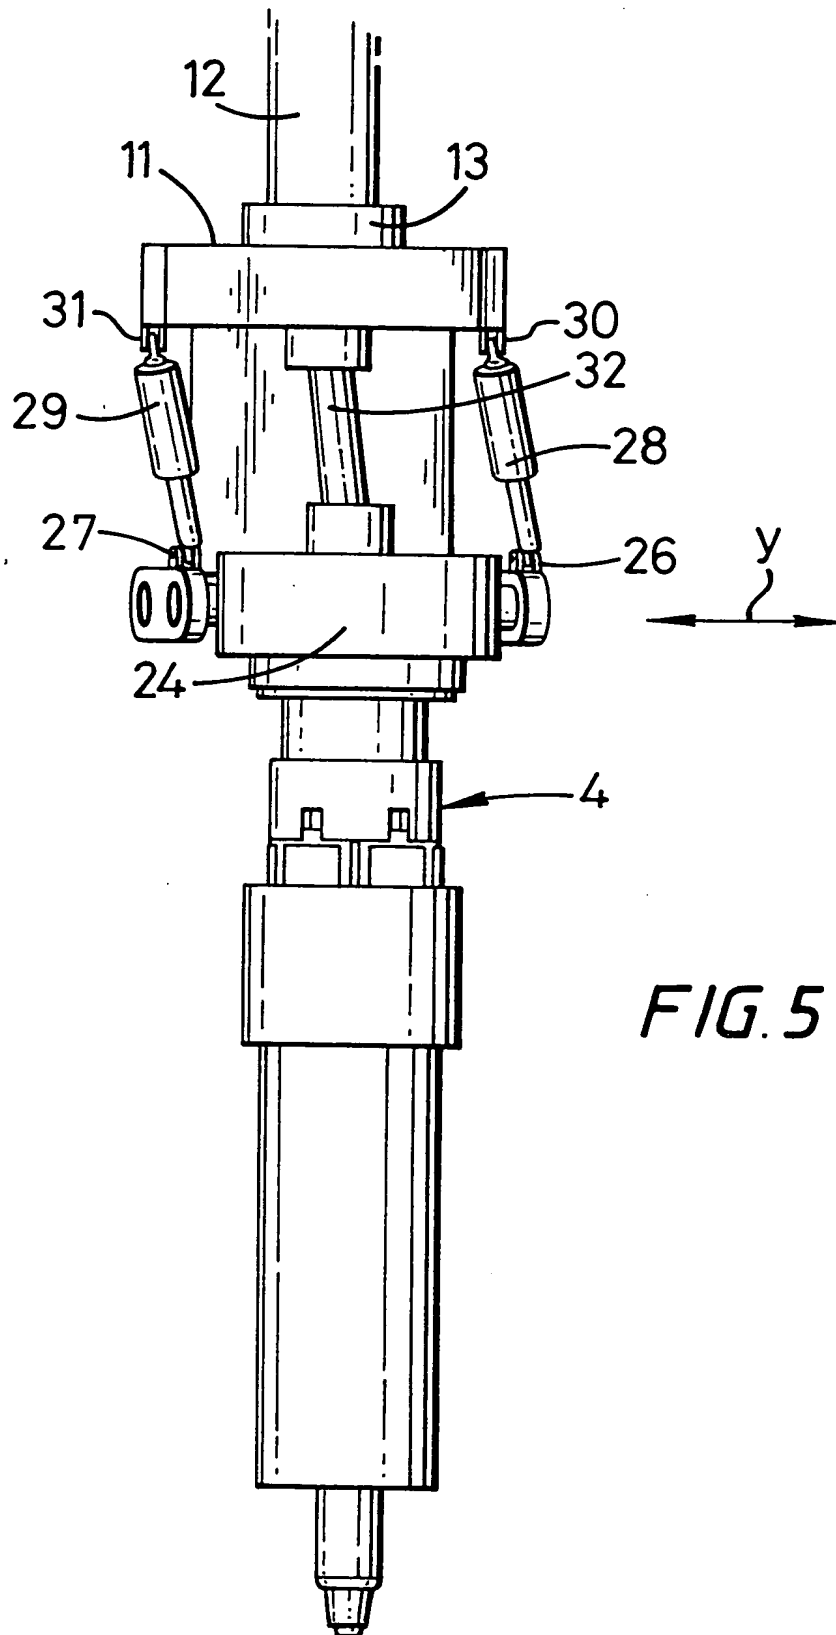


FIG. 5

FIG. 6

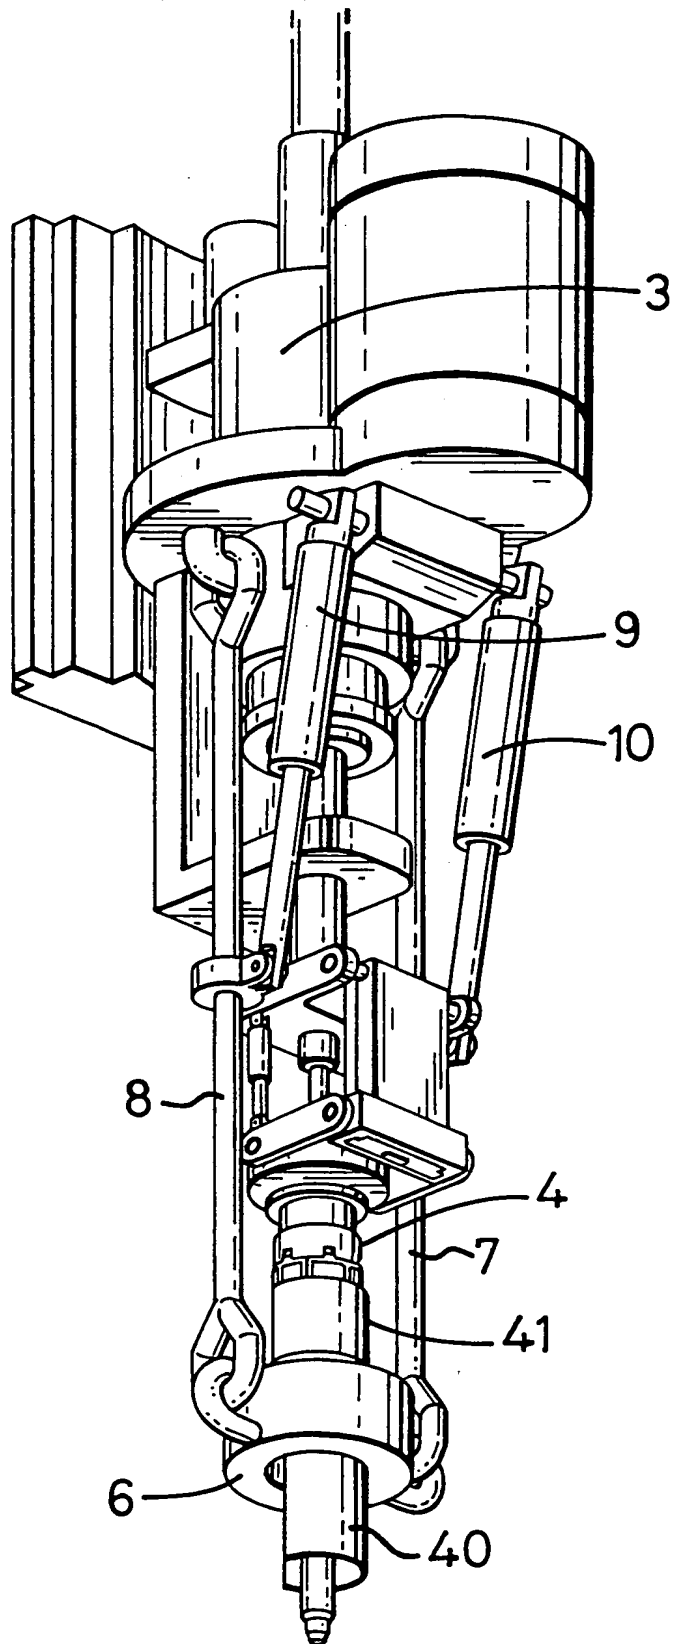


FIG. 7

